


PIN	FUNCTION	COLOR
1	MOTOR U	YELLOW
2	MOTOR V	RED
3	MOTOR W	BLACK
4	MOTOR PE $\perp$	YELLOW/GREEN
5	NC	NC


Connector Detail (Power Wire)

PIN	FUNCTION	COLOR	PIN	FUNCTION	COLOR
1	DC +5V	RED	9	W	GRAY/BLACK
2	GND	BLACK	10	V	WHITE/BLACK
3	NC		11	/Z	YELLOW/BLACK
4	U	BROWN/BLACK	12	/B	GREEN/BLACK
5	/U	BROWN	13	/A	BLUE
6	Z	YELLOW	14	/W	GRAY
7	B	GREEN	15	/V	WHITE
8	A	BLUE/BLACK			




DB 15M

Connector Detail (Feedback Wire)

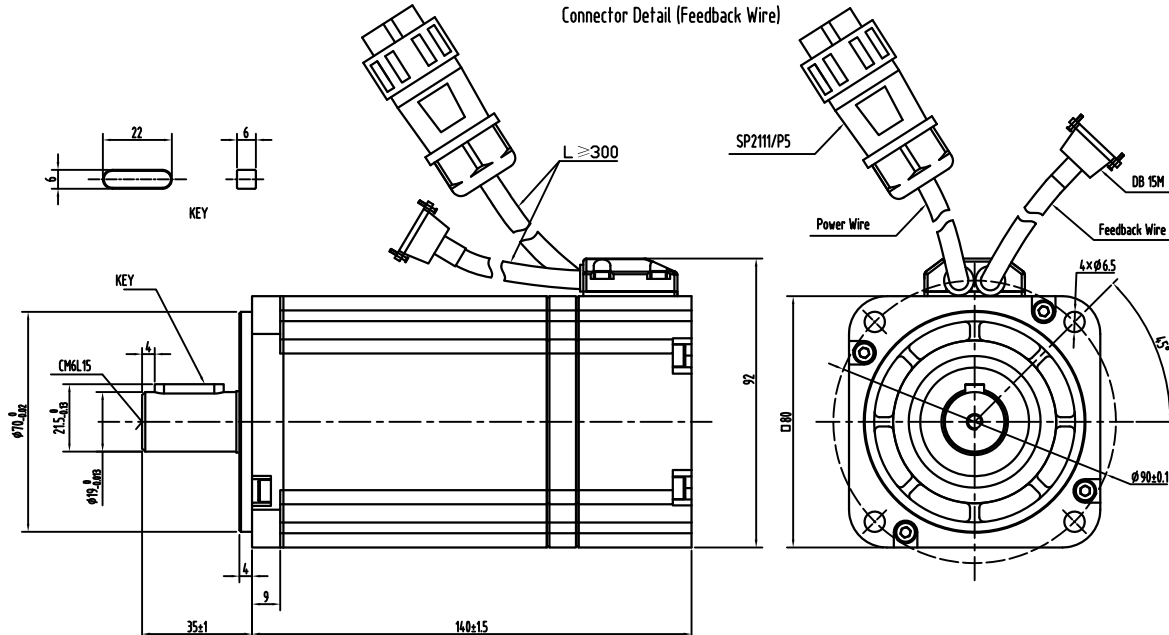

Technical Data		
No. of poles	6	
DC Link Voltage $U_{dc}$ (DC Link)	4.8	
Rated Power $P_n$ (W)	750	
Rated Torque $T_n$ (N.m)	2.39	
Rated Speed $n$ (rpm)	3000	
Rated Current $I_n$ (A)	19	
Maximum torque $T_m$ (N.m)	7.17	
Maximum Current $I_m$ (A)	57	
Standstill torque $T_s$ (N.m)	2.63	
Standstill current $I_s$ (A)	20.9	
Resistance line-line $R_L$ ( $\Omega$ )	0.11	
Inductance line-line $L_L$ (mH)	0.42	
Electrical time constant $\tau_e$ (ms)	3.82	
Mechanical time constant $\tau_m$ (ms)	1.38	
Voltage constant $K_v$ (V/krpm)	8	
Torque constant $K_t$ (Nm/A)	0.132	
Rotor moment of inertia $J_m$ (Kg.cm <sup>2</sup> )	1.26	
Max. voltage rising $du/dt$ (KV/ $\mu$ s)	8	
Insulation class	F	
Max. radial force $F_r$ (N)	335	
Max. axial force $F_a$ (N)	167.5	
Weight(Kg)	2.9	
Feed back device	2500p/rev incremental encoder TS6014N119	
Temperature sensor	n.a.	
Cooling method	Totally enclosed non-ventilated	
protection level	IP65,shaft sealing IP54	
Environmental conditions	Temperature	-20C ~40C
	Humidity	Below 90%RH (No dewing)
	Environment	Far away active gas,combustible gas,oil drop,ash.
Rating conditions	Installation altitude	UP TO 1000m:rated power, above 1000m:15% power decreasing per 100m,max.4000m
	Mounting	Aluminum flange 255x255x6mm
	Temperature	60K housing temperature ring at 40C ambient

Performance Curve

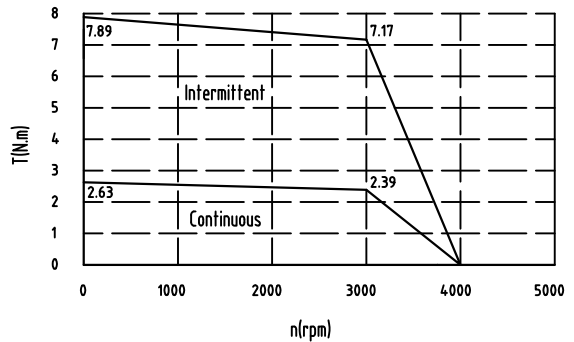

REV	ECN NO.	DRN	APP'D	DATE	DESIGN	DATE	P/N.
					YJL	2019.3.14	9.5622SS
UNLESS OTHERWISE SPECIFIED TOLERANCES:				MATERIAL	CONTR.	CHECK	TITLE
DECIMALS: $\pm 0.5$						ZZB	Outside Drawing
ANGULAR: $\pm 0^{\circ}30'$							USED ON
.X $\pm 0.25$							SMC80S-0075-30AAK-3DSH
.XX $\pm 0.1$						SL	DWG NO.
.XXX $\pm 0.1$							REV V1.0
UNIT: mm				FIRST ANGLE PROJECTION	SCALE		
DO NOT SCALE DRAWING					SHEET	OF	

Kinco